

2" TROLL BALL

A fluid-driven unit offering improved cleaning over traditional static spray balls. The Troll Ball offers four different spray patterns and is suitable for CIP installation.


- 316 stainless steel construction.
- Food-grade approved materials.

SPECS

- Minimum Opening: 2"/50 mm
- PSI / Bar: 50-200 / 3.5-13.8
- GPM / LPM: 13-34 / 49-129
- Cleaning Radius: 6'
- Pipe Connections: 3/4" Female NPT
- Maximum Operating Temperature: 250°F
- Nominal Head Rotation Speed: 3 to 15 RPM
- Length: 7"
- Weight: 1 lb., 9 Ounces



NOMINAL PRESSURE FLOW CURVES

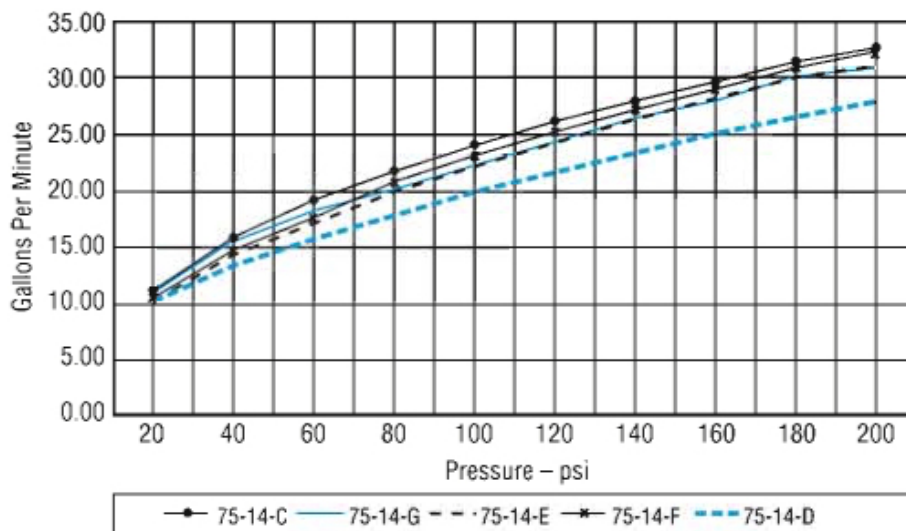

IMPACT PATTERNS

