

DRUM MAJOR

The Drum Major offers a slim, sanitary design for clean-in-place or portable applications with small tank openings, keg and drum bungholes. The unit is hydraulically driven by the cleaning solution ensuring effective cleaning from any installation position.


- Four available spray patterns.
- 316 stainless steel construction.
- Approved for food-grade applications.

SPECS

- Minimum Opening: 2"/50 mm
- PSI / Bar: 50-180 / 3.5-12.4
- GPM / LPM: 12-30 / 45-114
- Cleaning Radius: 6'
- Pipe Connections: 3/4" Female NPT
- Maximum Operating Temperature: 250°F
- Nominal Head Rotation Speed: 3 to 15 RPM
- Length: 7"
- Weight: 2 lbs.



NOMINAL PRESSURE FLOW CURVES

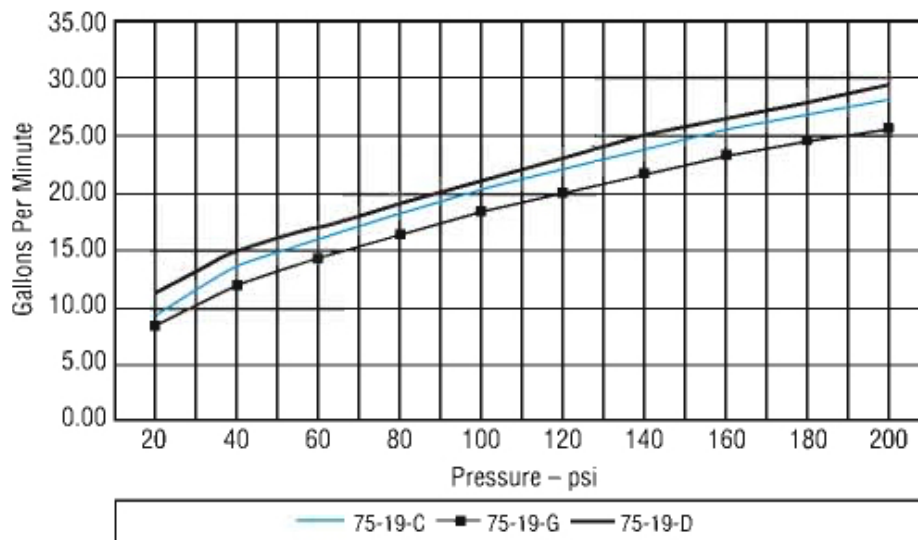

IMPACT PATTERNS

