

Sellers[®]

Cleaning Systems

Tank Man™

*High Impact –
High Performance*

Sellers' Tank Man provides effective, thorough tank cleaning with a minimum of cost and maintenance for a variety of applications.

- Brewing
- Chemical Processing
- Ethanol
- Food Processing
- Dairy
- Numerous Others

Simple Modern Design


Both dual- and triple-nozzle tank cleaners concentrate hot or cold cleaning solutions into powerful scouring action.

- 360° cleaning pattern provides thorough non-stripping cleaning
- Non-lubricated
- Slow rotating speed reaches every tank surface
- Self-cleaning

Engineered Quality

The Tank Man's hydraulic drive gives it longer life and more reliability, without any internal drive gears to worry about.

- Self-lubricated by cleaning solution
- Unit testing prior to shipment
- Ease of field maintenance



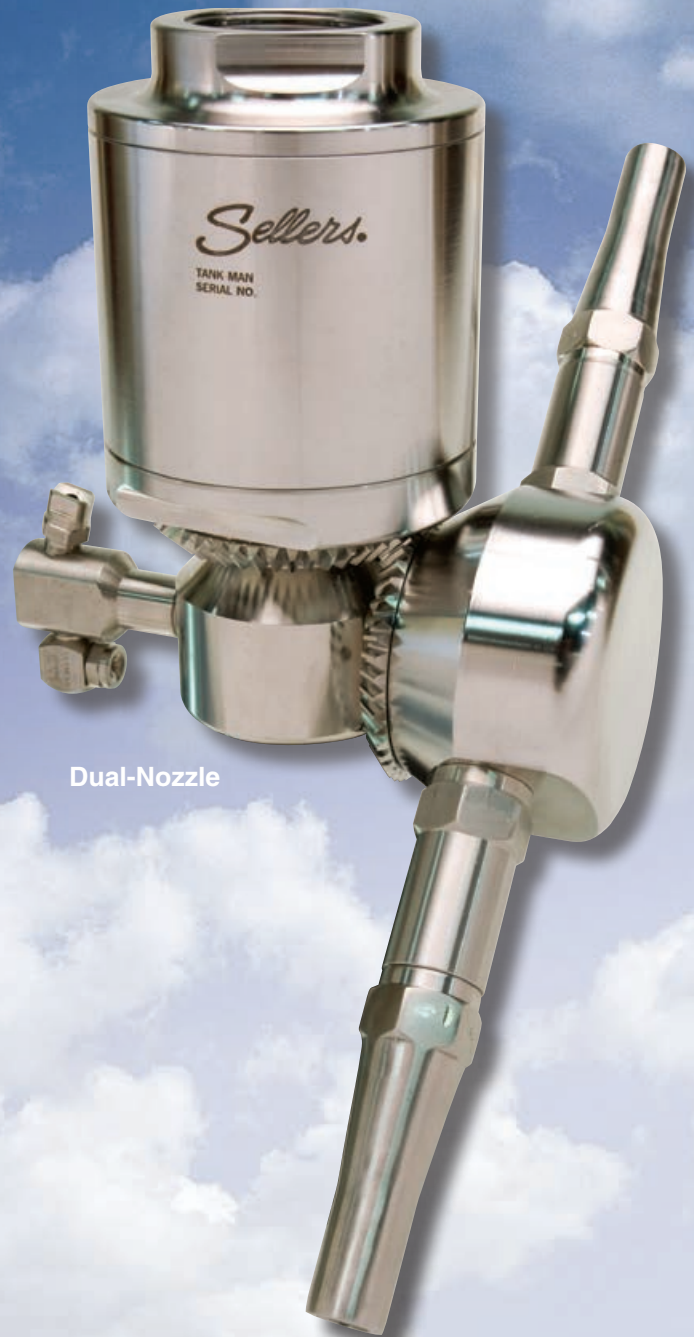


Dual-Nozzle


Specifications

| | | | |
|----------------------------|---------------------------|-----------------------------------|--|
| Operating Pressure: | 60-150 PSI (4.1-10.3 BAR) | Nozzle Orifice Diameter Options – | |
| Flow Capacity: | 60-125 GPM (227-473 l/m) | Dual: | 5/16" (7.8 mm); 3/8" (9.5 mm); 7/16" (11 mm) |
| Max. Operating Temp: | 250°F (120°C) | Triple: | 5/16" (7.8 mm); 3/8" (9.5 mm); 7/16" (11 mm) |
| Effective Cleaning Radius: | 22 ft (6.7 m) | Approx. Weight: | 15 lbs (6.8 kgs) |
| Pipe Connection: | 1½ in NPT | Materials: | Stainless Steel; Food Grade Plastics |

Technical Information

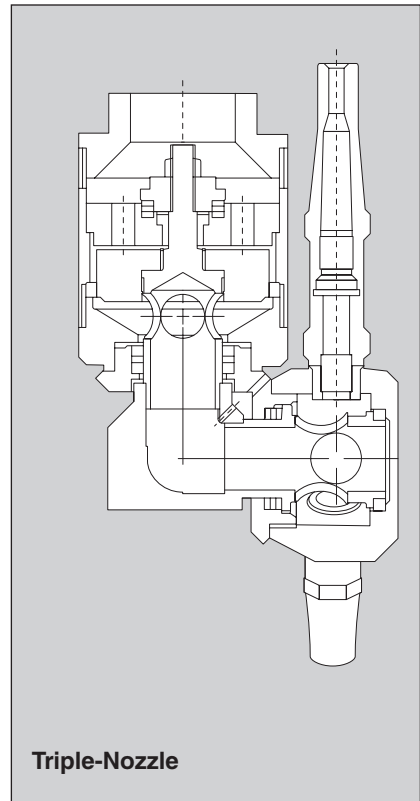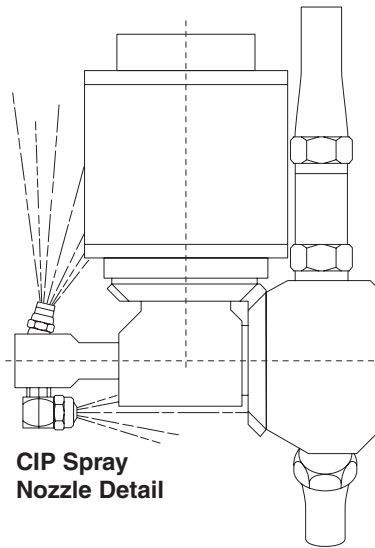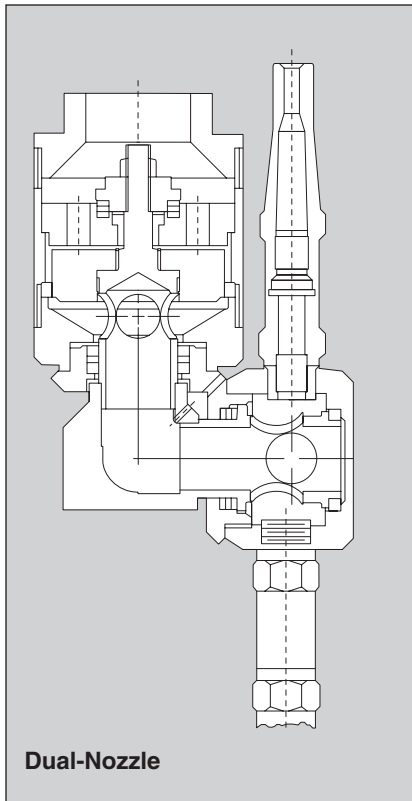


**Flow Versus Pressure for
Dual-Nozzle TANK MAN**

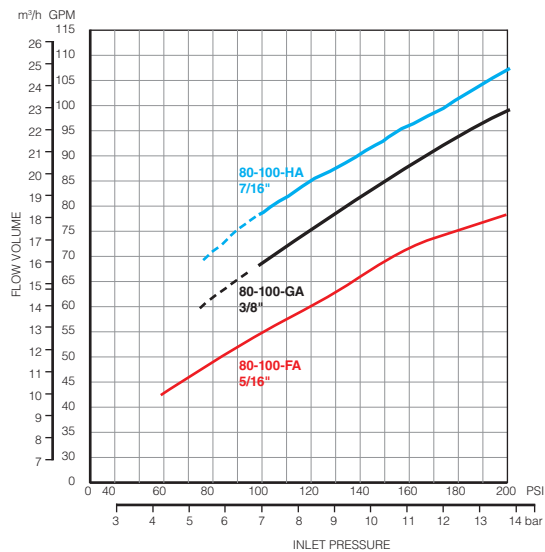

Opening Size: 6.5 in
Weight: 15 lbs

**Flow Versus Pressure for
Triple-Nozzle TANK MAN**

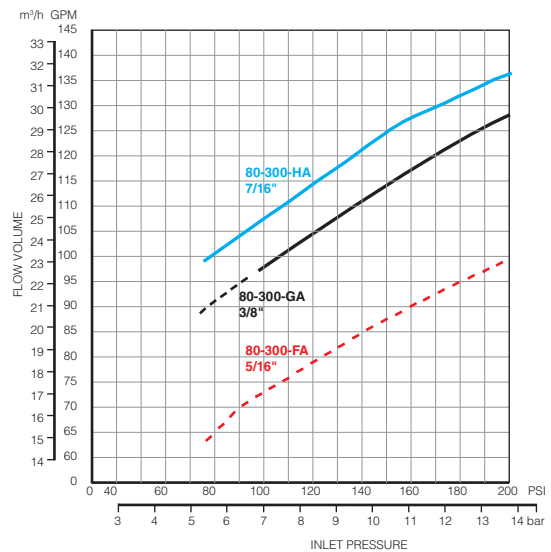

Opening Size: 12.5 in
Weight: 15 lbs